


## NOISE-BAN CUSTOM

The Noise-Ban Custom is an affordable custom-made hearing protection device manufactured from a durable acrylic material. Fitted with a fixed filter it allows for communication while protecting your hearing in high noise areas.


### FEATURES

- More cost effective than disposable hearing protection
- Increased productivity
- Long-term reliable protection
- On-site monitoring service by accredited staff
- 100% leak-tight test in the ear of the user
- Individual training and motivation
- Directional hearing is unimpaired
- Small, light and robust
- Made from acrylic material that can be adjusted for a perfect fit
- Allows for communication - different filters for different noise environments
- Hygienic and easy to clean
- Conforms to the EN 352-2 standard for hearing protectors
- Manufacturing laboratory is ISO 9001:2015 accredited
- Unique serial number and users name embedded in product
- Cord and clip help to minimise loss
- Comes with a storage pouch, cleaning kit and instruction leaflet
- Available in different colours
- Information is stored on a database

### TECHNICAL SPECS

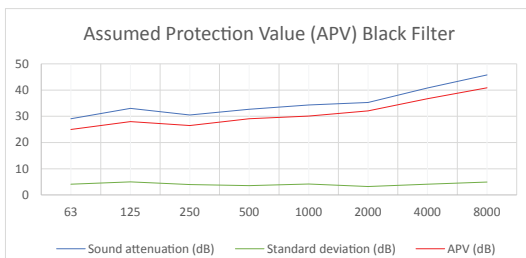

SNR- value =	34dB
H- value =	34dB
M- value =	31 dB
L- value =	29 dB

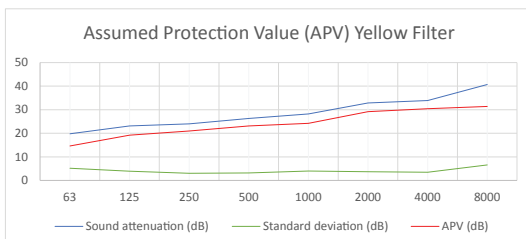

SNR- value =	28 dB
H- value =	29 dB
M- value =	25 dB
L- value =	23 dB

### PRODUCT IMAGE(S)



### PROCESS

#### 1. Needs Assessment

Our sales representative will discuss your requirements regarding your Hearing Conservation Management Programme and planned implementation.

#### 2. Impressions

Our technicians will visit on-site to take impressions of the selected employees' ears. During the impression taking the technician will:

- Explain the process to the employees.
- Inspect the employee's ears.
- Take the impressions.
- Capture information on a database.

#### 3. Manufacturing

- Our Laboratory is ISO 9001:2015 accredited.
- The lead-time is approximately 4 - 6 weeks once the impressions is received.

#### 4. Fitment

The technician will schedule an appointment to fit the Noise-Ban on-site.

During the fitment the technician will:

- Do a comfort assessment.
- Do a leak-tight seal check.
- Training and motivating the user.
- Capture information on a database.

#### 5. Monitoring

Annual monitoring is done to ensure that the Noise-Ban continues to function effectively in the user's ears. This extends the warranty for another 12 months.

Steps taken:

- Assess the use and check the condition of the hearing protection device.
- Do a leak-tight seal test.
- Check attenuation requirements.
- Cleaning of the product.
- Replace broken or faulty parts.
- Assist and re-train the user in the use and maintenance of the product.

### CONTACT US

1255 Cobham Road  
Queenswood  
Pretoria, 0186

(012) 403-8740  
sales@noiseban.co.za  
www.noiseban.com

