NOISE-BAN™ SOFT

Noise-Ban™ Soft is made from medical grade silicone material, making it more comfortable to wear with tight fitting helmets. Interchangeable filters are available for different applications.

Various colours are available.

Ideal for

DIY Workshops | Gardening Mowers and Blowers | Concerts | Office Background Noise | Students | And Many More Applications

**Note that Silicone material is not suitable for areas where oils, chemicals and solvents are used.*

FEATURES

- More cost effective than disposable hearing protection
- Increased productivity
- Long- term reliable protection
- On-site monitoring service by accredited staff
- 100% leak-tight test in the ear of the user
- Allows for communication – different filters for different noise environments
- Individual training and motivation
- Directional hearing is unimpaired
- Small and light
- Hygienic and easy to clean
- Filter can be removed for effective cleaning of the ear piece
- Filter supplier EN 352-2 certificate
- Manufacturing laboratory is ISO 9001:2015 accredited
- Cord and clip help to minimise loss
- Comes with a storage case, cleaning kit and instruction leaflet
- Available in various colours
- Information is stored on a database

TECHNICAL SPECS

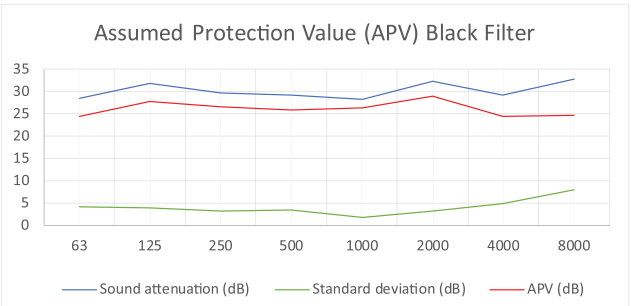

SNR- value =	28 dB
H- value =	26 dB
M- value =	26 dB
L- value =	26 dB

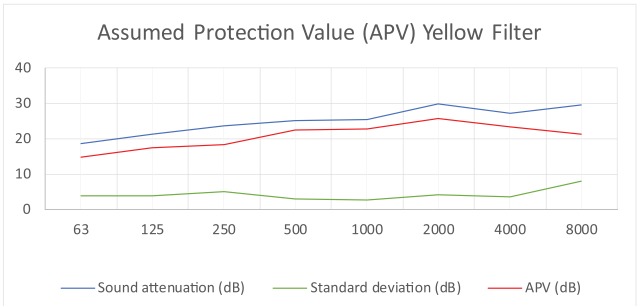

SNR- value =	25 dB
H- value =	24 dB
M- value =	23 dB
L- value =	21 dB

NOTE: Silicone products can be affected by certain oils and chemicals that are used in industrial environments. Please discuss with the technician.

CONTACT US

ADDRESS
1255 Cobham Road, Queenswood,
Pretoria, 0186, South Africa

CONTACT NUMBERS
Tel: (012) 403-8740
Fax: (012) 333-7332

EMAIL ADDRESS
sales@noiseban.co.za

www.noiseban.com

noisebanZA

NOISE-BAN™ SOFT

PROCESS

1. Needs Assessment

Our sales representative will discuss your requirements regarding your Hearing Conservation Management Programme and planned implementation.

2. Impressions

Our technicians will visit on-site to take impressions of the selected employees' ears. During the impression taking the technician will:

- Explain the process to the employees
- Inspect the employee's ears
- Take the impressions
- Capture information on a database

3. Manufacturing

- Our laboratory is ISO 9001:2015 accredited

The lead-time is approximately 4 – 6 weeks once the impressions is received

4. Fitment

The technician will schedule an appointment to fit the Noise-Ban on-site. During the fitment the technician will:

- Do a comfort assessment
- Do a leak-tight seal check
- Training and motivating the user
- Capture information on a database

5. Monitoring

Annual monitoring is done to ensure that the Noise-Ban continues to function effectively in the user's ears. This extends the warranty for another 12 months. Steps taken:

- Assess the use and check the condition of the hearing protection device
- Do a leak-tight seal test
- Check attenuation requirements
- Cleaning of the product
- Replace broken or faulty parts

Assist and re-train the user in the use and maintenance of the product

CONTACT US

ADDRESS
1255 Cobham Road, Queenswood,
Pretoria, 0186, South Africa

CONTACT NUMBERS
Tel: (012) 403-8740
Fax: (012) 333-7332

EMAIL ADDRESS
sales@noiseban.co.za

www.noiseban.com

noisebanZA